

# DETECTION METHOD FOR TRANSMITTER IDENTIFICATION INFORMATION IN DAB STREAM

Publication number: JP11154919 (A)

Publication date: 1999-06-08

Inventor(s): SCHAEFER WOLFGANG; GRAESSLE JUERGEN;  
ZUMKELLER MARKUS +

Applicant(s): SONY INT EUROP GMBH +

Classification:

- international: **H04B1/16**; **H04H60/50**; **H04J11/00**; **H04H60/51**; **H04B1/16**;  
**H04J11/00**; (IPC1-7): **H04H1/00**; **H04B1/16**

- European: **H04H60/50**

Application number: JP19980240530 19980826

Priority number(s): EP19970115649 19970909

Also published as:

JP3954729 (B2)

EP0902563 (A1)

EP0902563 (B1)

US6134267 (A)

DE69735152 (T2)

more >>

## Abstract of JP 11154919 (A)

**PROBLEM TO BE SOLVED:** To obtain a reliable result, even when a signal to noise ratio is low, in the detection method of transmitter identification information in a null symbol of a DAB stream.

**SOLUTION:** The detection method of transmitter identification information, i.e., TII, in a DAB stream includes the following four steps: to obtain a spectrum of a null symbol demodulated by applying differential demodulation to a pair of TII included in a spectrum for each 2nd null symbol of a received DAB stream, to correct a phase of a carrier of the spectrum of the demodulated null symbol by a TFR phase reference code, to decide a threshold value, and to discriminate whether or not the carrier has been set by comparing a level of the carrier with a threshold level decided in a preceding step.

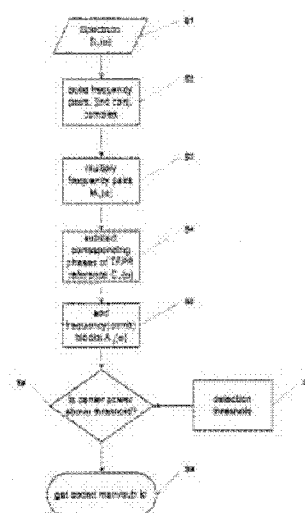


Fig. 1

Data supplied from the **espacenet** database — Worldwide